


ASPHALT/CONCRETE
RESTORATION

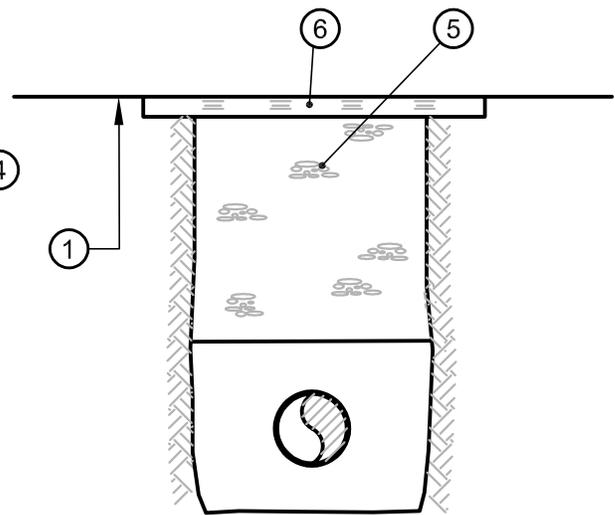


SHOULDER AND
EASEMENT RESTORATION

- ① EXISTING SURFACE
- ② PERMANENT PATCH- MATCH EXISTING DEPTH (3" MIN.) DEPTH 1/2" HMA ASPHALT. JURISDICTIONAL REQUIREMENTS OVERRIDE.
TEMPORARY PATCH- 2" MIN. DEPTH 1/2" HMA ASPHALT ON 3" MIN. CRUSHED SURFACING.
- ③ CRUSHED GRAVEL PER STD PLANS 7 & 7A LOCAL JURISDICTIONAL REQUIREMENTS OVERRIDE.
- ④ NEAT LINE ACP CUT. TACK EDGES WITH EMULSIFIED ASPHALT SEAM SEAL WITH A NARROW APPLICATION OF AR4000. UNLESS OVERLAY SCHEDULED FOR CURRENT YEAR.
- ⑤ TRENCH BACKFILL- SEE STANDARD DETAIL 7 & 7A OR PER LOCAL JURISDICTION
- ⑥ RESTORE EXISTING SURFACE. TOP SOIL, CSTC (2" MIN.) OR AS NOTED ON THE PLANS.
- ⑦ 2" ASPHALT 1/2" HMA FULL WIDTH OVERLAY, INCLUDING PAVED SHOULDERS, WHEN SPECIFIED ON THE PLANS OR REQUIRED BY THE JURISDICTIONAL AUTHORITY.

NOTES:

- 1. THESE STANDARDS ARE THE MINIMUM ALLOWABLE. LOCAL JURISDICTIONAL REQUIREMENTS SHALL OVERRIDE WHERE APPLICABLE.
- 2. SEE TYPICAL TRENCH SECTION DETAIL (STANDARD PLAN 7 & 7A).
- 3. DAILY TEMPORARY TRENCH PATCH REQUIRED IF PERMANENT PATCHING NOT IN PLACE. CONTRACTOR SHALL BE AWARE "T" IS REQUIRED SO PERMANENT PATCH RESIDES ON 12" OF UNDISTURBED MATERIAL. PERMANENT PATCH SHALL BE INSTALLED WITHIN 30 DAYS OF EXCAVATION. "T" CUT SHALL NOT BE PERFORMED UNTIL TRENCH IS BACKFILLED.



Woodinville
Water District

TRENCH
PAVEMENT & SURFACE
RESTORATION



WATER STD.
PLAN NO. ⑧

REVISION DATE
04/25